



MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLERS

LAUNDRY SOLUTIONS
YOU CAN **DEPEND** ON.

MDG30/50/75PNH



KEEP YOUR OPERATION SAFE

The Sensor-Activated Fire Extinguisher (SAFE) automatically senses dryer fires, douses them with water and shuts off when the fire is out to minimize water damage. It's a breakthrough in commercial laundry safety that can even reduce your insurance costs!



MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

FOR YOUR OPERATION:

- Auto Cycle Prevents Overdrying
- Programmable Anti-Wrinkle Feature
- Display Counts Down Time Remaining In Cycle
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Available in 30-, 50-, And 75-Pound Capacities
- Optional Reversing Tumbler Feature Reduces Twisting
- Optional Auto Dry Or Time Dry Feature

BUILT-TO-LAST™ FEATURES:

- SAFE System Puts Out Dryer Fires
- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor



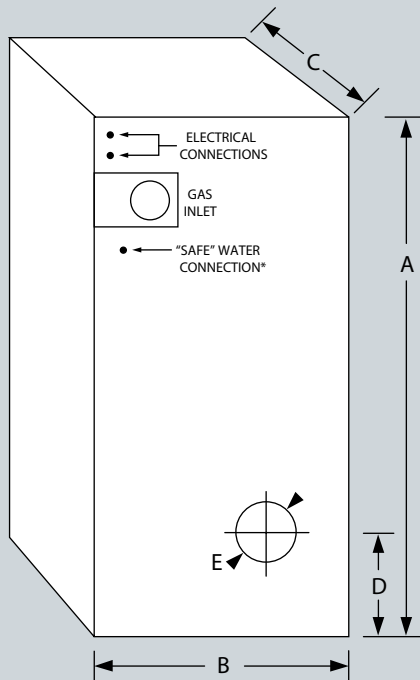
Model MDG30PNH




Model MDG50PNH

**PROGRAMMED CYCLES FOR
BETTER RESULTS AND
GREATER
EFFICIENCY.**

On-Premises Drying Tumblers — MICROPROCESSOR CONTROL

Available In 30-, 50- And 75-Pound Capacities



	Multi-Load Dryer		
DRYER SPECIFICATIONS			
MODEL	MDG30PNH	MDG50PNH	MDG75PNH
TUMBLER CAPACITY			
Lbs. (kg)	30 (13.6)	50 (22.7)	75 (34)
Cu. ft. (cu. m)	12.5 (.354)	18.3 (.518)	22.4 (.634)
DRIVE MOTOR			
HP (kw)	1/2 (.373)	3/4 (.560)	1 (.746)
REVERSING TUMBLER (optional)			
		•	•
AIRFLOW			
Cfm (cmm)	460 (13)	750 (21.2)	1,000 (28.3)
HEAT INPUT			
BTU/hr. (kcal/hr.)	100,000 (25,200)	150,000 (37,800)	175,000 (44,100)
GAS INLET			
In. (cm)	1/2 (1.3)	1/2 (1.3)	3/4 (1.9)
VOLTAGE/BREAKER SIZE — amps			
120V/1 PH 208V/3 PH (3-wire + ground)	15	20 15	20 15
COLOR			
White	•	•	•
APPROXIMATE WEIGHT			
Crated — lbs. (kg)	571 (259)	700 (317.5)	771 (349.7)
Uncrated — lbs. (kg)	534 (242.2)	651 (295.3)	721 (327)
DIMENSIONS			
A) Height — in. (cm)	72 (182.9)	72 (182.9)	75 1/8 (190.8)
B) Width — in. (cm)	34 1/4 (87)	34 1/4 (87)	38 1/4 (97.2)
C) Depth including door handle — in. (cm)	38 (96.5)	49 5/8 (126)	48 1/2 (123.2)
D) Floor to center of exhaust — in. (cm)	10 1/2 (26.7)	10 1/2 (26.7)	18 1/4 (46.4)
E) Exhaust diameter — in. (cm)	8 (20.3)**	8 (20.3)**	8 (20.3)**
F) Door Opening — in. (cm)	21 1/2 (54.6)	21 1/2 (54.6)	21 1/2 (54.6)
**Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.			
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.			
			
			

MAYTAG® LIMITED WARRANTY

2 YEARS — ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

